

ELECTRIC PATTERN  
SEWING MACHINE

# 电脑花样机

高效美观的缝制效果，缝制范围更广、适应性更强，使用节能技术，机器更节能，更环保。

Highly active, pleasing to the eyes sewing effects, more large sewing area, more stronger practise, saving energy, more environmental protection.




## CC-1010G-01S CC-1310G-01S CC-1510G-01S

缝制范围：100x100mm / 130x100mm / 150x100mm

张力一致的缝制  
花样编辑快速简便  
强大机针贯穿力  
优越的扩展改装空间  
高品质缝纫

Tension exactly same sewing  
Quickly and easy pattern edit  
Strong needle penetration  
Superior expand and change space  
High quality sewing.

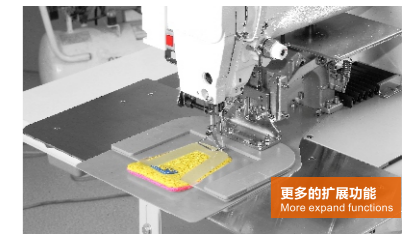

### 规格 Specification

型号Model	CC-1010G-01S	CC-1310G-01S	CC-1510G-01S
线迹Line	单针平缝Single-needle flat seam		
最高缝纫速度Highest sewing speed	2,700 rpm		
缝制区域(X × Y) Sewing area	最大(Maximum)100x100 mm	最大(Maximum)130 × 100mm	最大(Maximum)150 × 100mm
送布装置 Cloth feeding device	间歇送布 (脉冲马达驱动) Intermittent feeding (driven by pulse motor)		
针距 Stitch length	0.05 - 12.7mm		
最大针数Max. needle number	20,000针/1个图案(20,000 needles/1 pattern)		
压脚驱动方式 Foot presser driving mode	脉冲马达驱动Pulse motor drive		
压脚高度 Work Clamp Height	最大25 mm maximum 25 mm		
两步压脚2-step presser foot	一体式压脚/All-in-one presser foot		
间歇压脚上升量 Rising amount of intermittent foot presser	22 mm		
间歇压脚行程 Stroke by intermittent presser foot	0或2 - 10 mm (出厂设置: 3mm) 0 or 2 - 10 mm (Factory defaults: 3mm)		
旋梭Hook	两倍摆梭 Double Shuttle Hook		
扫线装置 Scavenging device	标准装备/Standard facility		
切线装置 Cutting device	标准装备/Standard facility		
数据存储方式Data storage way	USB或闪存 (使用CF卡可任意缝制图案) USB or Flash Card		
马达Motor	AC伺服马达550W/AC servomotor 550W		
重量Weight	机头: 约108 kg 操作盘: 约0.6 kg 控制箱: 14.2 - 16.2 kg(根据出口国家不同) Head: about 108 kg Operating panel: about 0.6 kg control box: 14.2 - 16.2 kg (according to different export countries)		
电源Power	单相Single phase 220V, 3相3-phase 380V		
气压Air pressure	0.5 Mpa 1.8L/min		
净重/N.W	160		
毛重/G.W	208		
包装尺寸/Measurement	1250*850*1350		
体积/CBM	1.44m <sup>3</sup>		